

Specifications

F.O.B. Sedalia, Missouri 65301



Pans Not Included

HS2-34 SHOWN

OPTIONAL ITEMS:

- Front and Rear Timer Bars
- Lids
- Pans
- Drain Shelves

HEATING:

Shelf or Zone (2X3, 2x4 & 3x4 only) wells for customized heating solutions
Quick heat up approximately 20 minutes



PRODUCT INFORMATION:

PROJECT: _____
ITEM: _____
QUANTITY: _____

MODEL:

Product Holding Unit - HS2

HS2-22	2 down, 2 across
HS2-23	2 down, 3 across
HS2-24	2 down, 4 across
HS2-34	3 down, 4 across
HS2-42	4 down, 2 across

CONTROLS:

Allows operator to set time decrement for each pan
Cook time warning allows for timely replenishment
Improved display shows item being held
Easy to reconfigure pan settings with flash drive programming feature from web based program site

BODY:

Stainless Steel Exterior construction for durability and ease of construction
Robust metal cover eliminates the cost and hassle of plastic lids.
Fully sealed, user replaceable timer bars that are designed for cleanability.
Eliminate faceplate cracks with new stainless steel construction
Sturdy, fully sealed shelves to prevent grease migration

REV E 04/06/2020

PRODUCT HOLDING UNIT - HS2

Catalog No. PHU-HS2

A.I.A. File No. 35-C-13









A.I.A. File No. 35-C-13

Catalog No. PHU-HS2

HS2

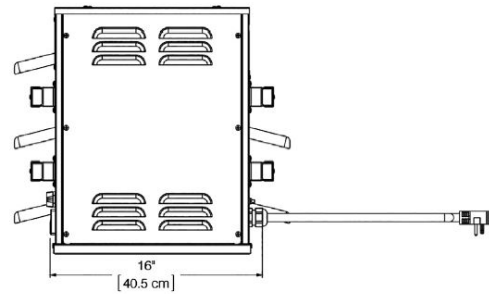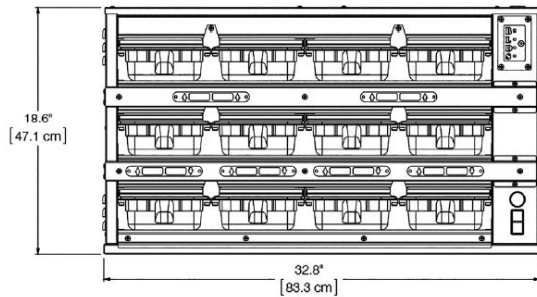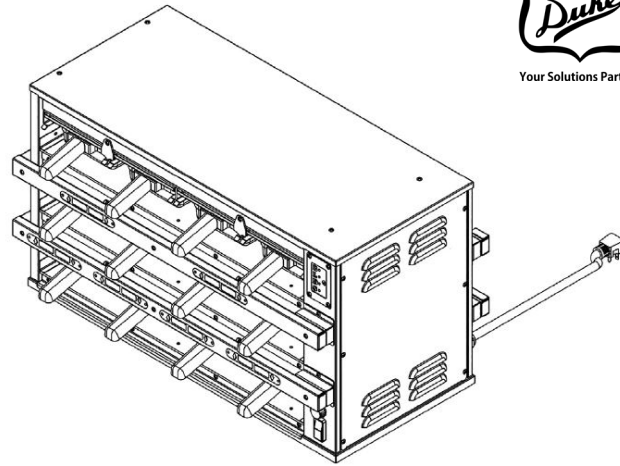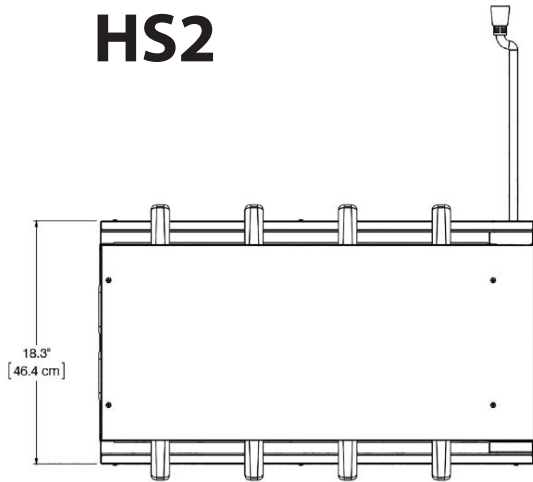

HS2-34 SHOWN

ELECTRICAL:

Model	120 Volt - 50/60		208/240 Volt - Hz 50/60		220/240 Volt - Hz 50/60	
	Amps	NEMA	Amps	NEMA	Amps	IEC
HS2-22	-	-	8.7/7.5	6-15P	8.2/7.5	60309
HS2-23	-	-	8.7/7.5	6-15P	8.2/7.5	60309
HS2-24	-	-	12.0/10.0	6-15P	11.0/10.0	60309
HS2-34	-	-	17.3/15.0	6-20P	16.0/15.0	60309
HS2-42	14.5	5-20P	12.0/10.0	6-15P	11.0/10.0	60309

DIMENSIONS:

Model	Height		Width*		Depth		Crated Ship Weight	
	in	cm	in	cm	in	cm	lbs	kg
HS2-22	12.9	32.8	18.7	47.4	18.3	46.5	84	38
HS2-23	12.9	32.8	25.7	65.3	18.3	46.5	101	46
HS2-24	12.9	32.8	32.8	83.3	18.3	46.5	117	53
HS2-34	18.6	47.2	32.8	83.3	18.3	46.5	162	74
HS2-42	24.2	61.5	18.7	47.4	18.3	46.5	126	57

* NOTE: Units with louvers add the following to width: **Domestic** +.20" (.508 cm) **International** + .55" (1.34cm)

PRODUCT HOLDING UNIT - HS2

